


Assembly Instructions

House-Style Chicken Nesting Box Starter Kit

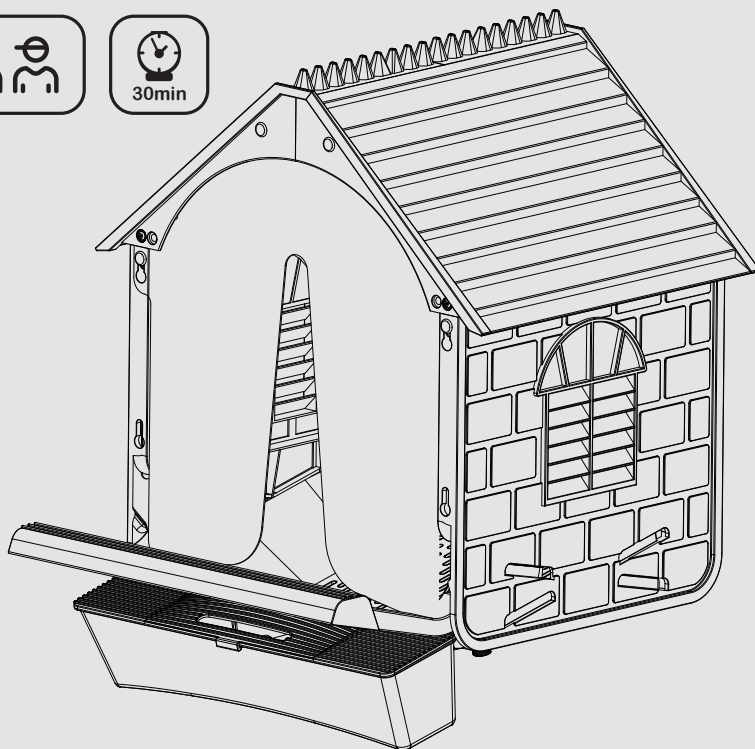

Before You Start

Read all instructions before assembly. Keep for future reference.

- Clear a flat, clean work surface.
- Have a Phillips-head screwdriver ready (not included in this kit).
- Do not use a power drill — hand-tighten only to avoid cracking the plastic.
- Keep all small parts (screws) out of reach of children and pets during assembly.

SAFETY WARNINGS

Read all safety warnings before starting assembly.

Warning

(Risk of injury if ignored)

WARNING

- Adult assembly required. Keep all small parts — screws, decoy egg — away from children under 6 and household pets during assembly.
- This product is designed for poultry nesting use only. Do not use as a step stool, shelf, toy, or general storage container.

Caution

(Risk of minor injury)

CAUTION

- Parts may have sharp edges, slots, or tabs. Handle carefully during assembly to avoid cuts; wearing work gloves is recommended.
- Do not overtighten screws. Overtightening can crack the ABS plastic body. Stop turning when the screw head sits flush against the surface.

NOTICE

(Risk of product damage or improper use)


NOTICE

- This nesting box is designed for home flocks with small to mid-size hen breeds — such as Silkie, Ameraucana, Leghorn, and Barred Rock.
- Not suitable for: meat breeds (e.g., Cornish Cross), jumbo-egg layers, or commercial-scale farms.
- Do not assemble any part that appears cracked, warped, or damaged. Contact customer support for a free replacement.


What's in the Box

Unbox and Inspect


Open the box and verify all parts before you start. Use the Parts List and Hardware List to confirm every item is present and undamaged.

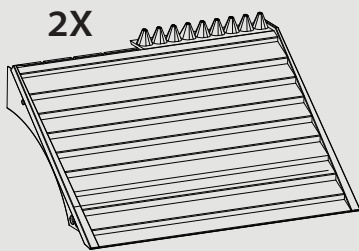


I Roof Panels

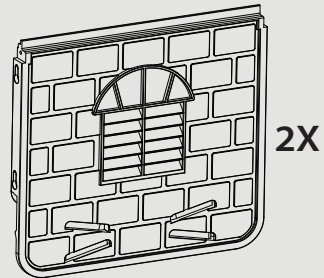


J Side Wall Panels

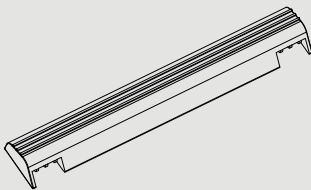


K Entry Perch

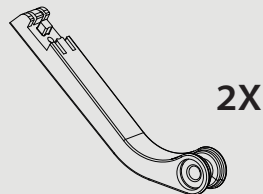

L Support Brackets

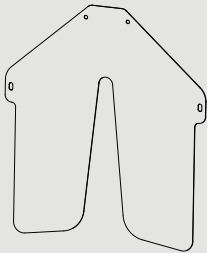

M Privacy Curtain

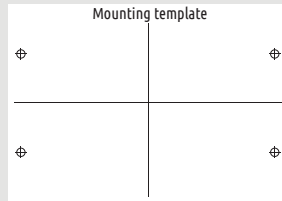

N Mounting template



O Pan-Head Screws (M4x14)



P Thumb Screws (M3x18)



Q Washers



R Snap Base - Female
(transparent)



S Snap Cap - Male
(transparent)



Assembly Instructions

This guide shows you how to assemble and use the product safely and correctly

If Anything Is Missing or Damaged

(For your safety)


⚠ WARNING

- Stop — do not attempt assembly with incomplete or damaged parts. Contact Difsight Customer Support for a free replacement:
 - Amazon Buyer-Seller Messaging
 - Email: support@difsight.com

STEP-BY-STEP ASSEMBLY

💡 TIP

- This product is assembled in two sections:
 - Roll-Away Nesting Box
 - Outer House Shell (Housing)

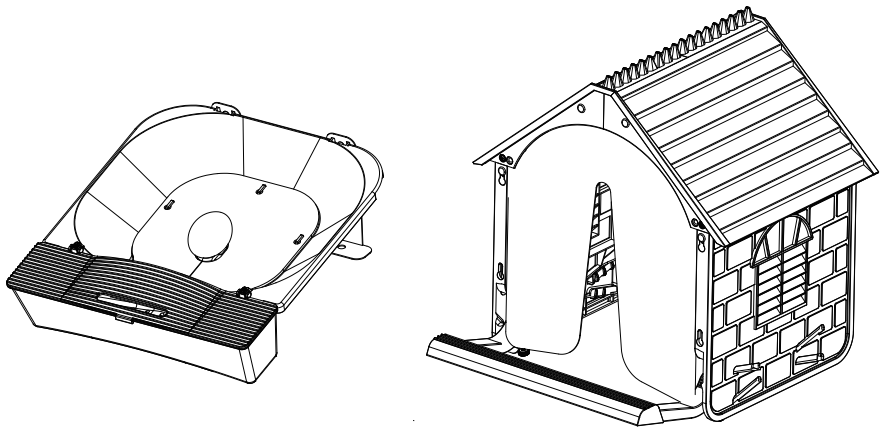


Assemble the Outer House Shell(Housing)

STEP 1—Align Roof Panels


I Roof Panels x2

Align the two Roof Panels (I) by crossing Point A with Point B.

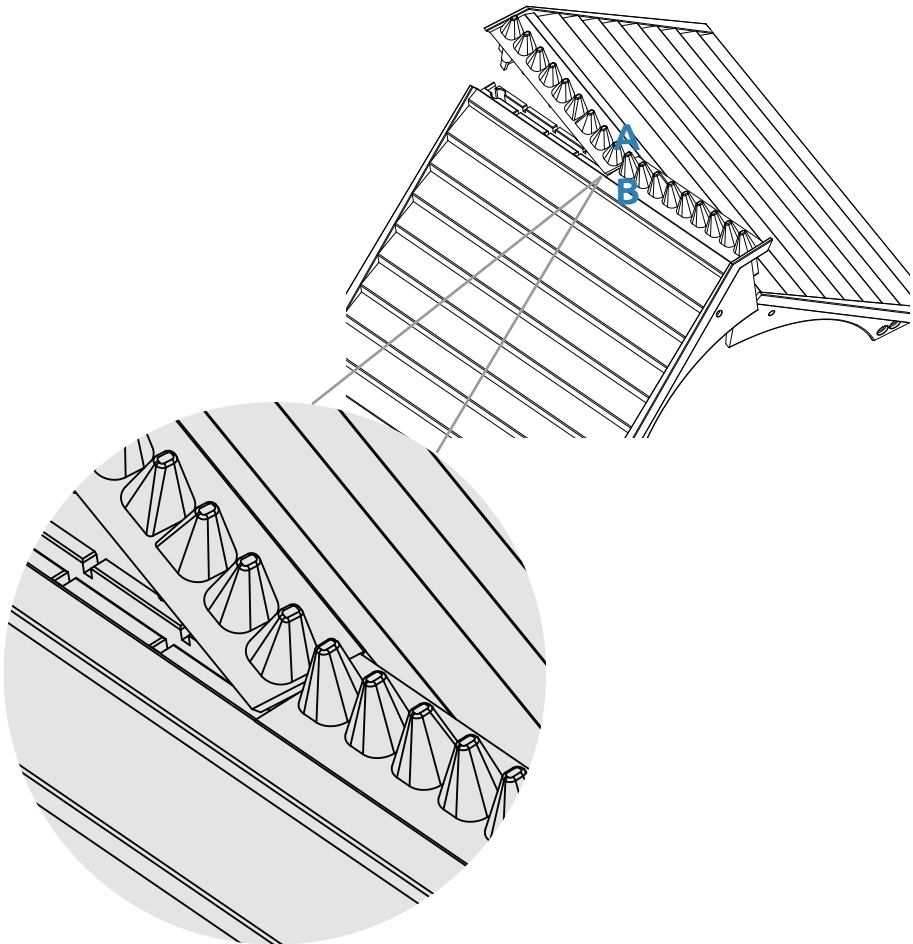

STEP 2—Join Roof Panels

Press the two Roof Panels (I) together, inserting Point A into Point B, until they lock flush.

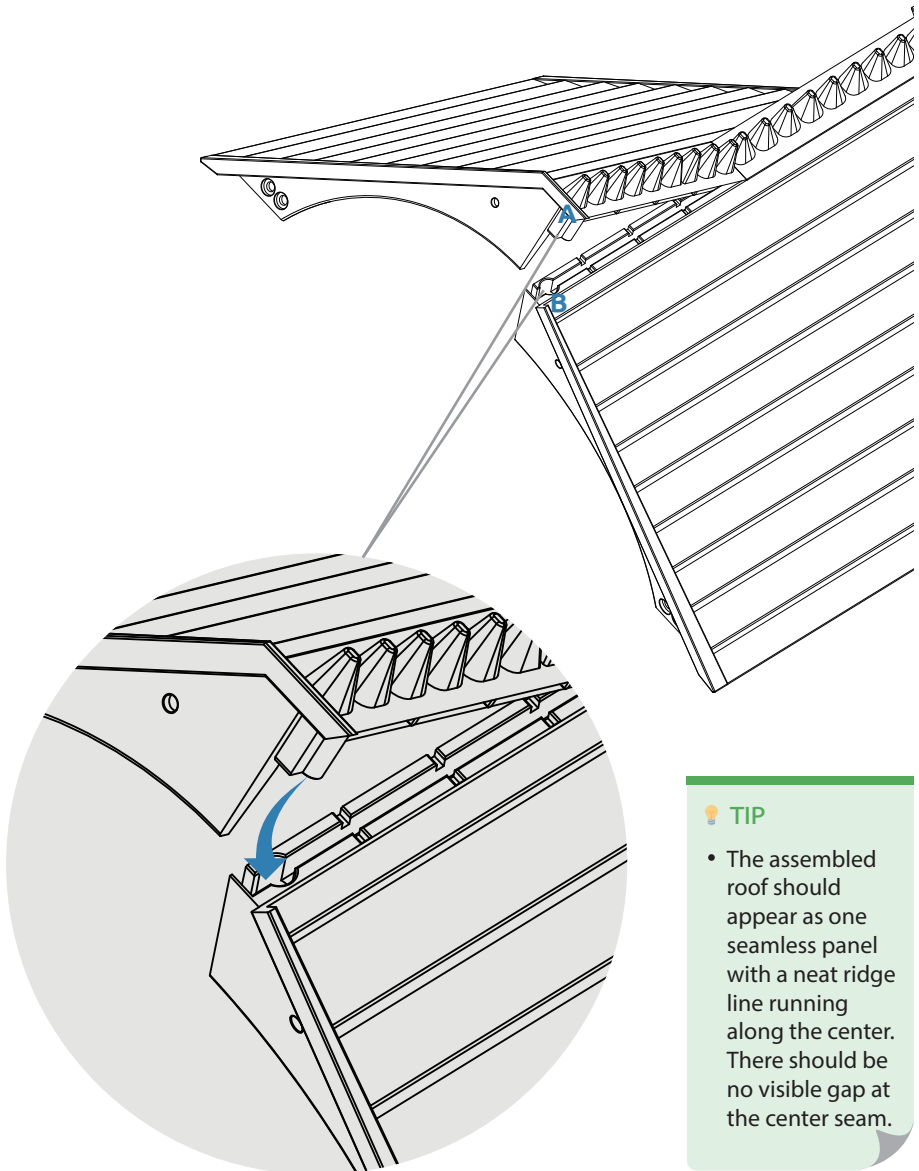


TIP

- The assembled roof should appear as one seamless panel with a neat ridge line running along the center. There should be no visible gap at the center seam.

STEP 3—Secure Roof Panels

- O** Pan-Head Screws (M4x14) x2


Insert Pan-Head Screws (O) into Hole A and Hole B, and tighten.

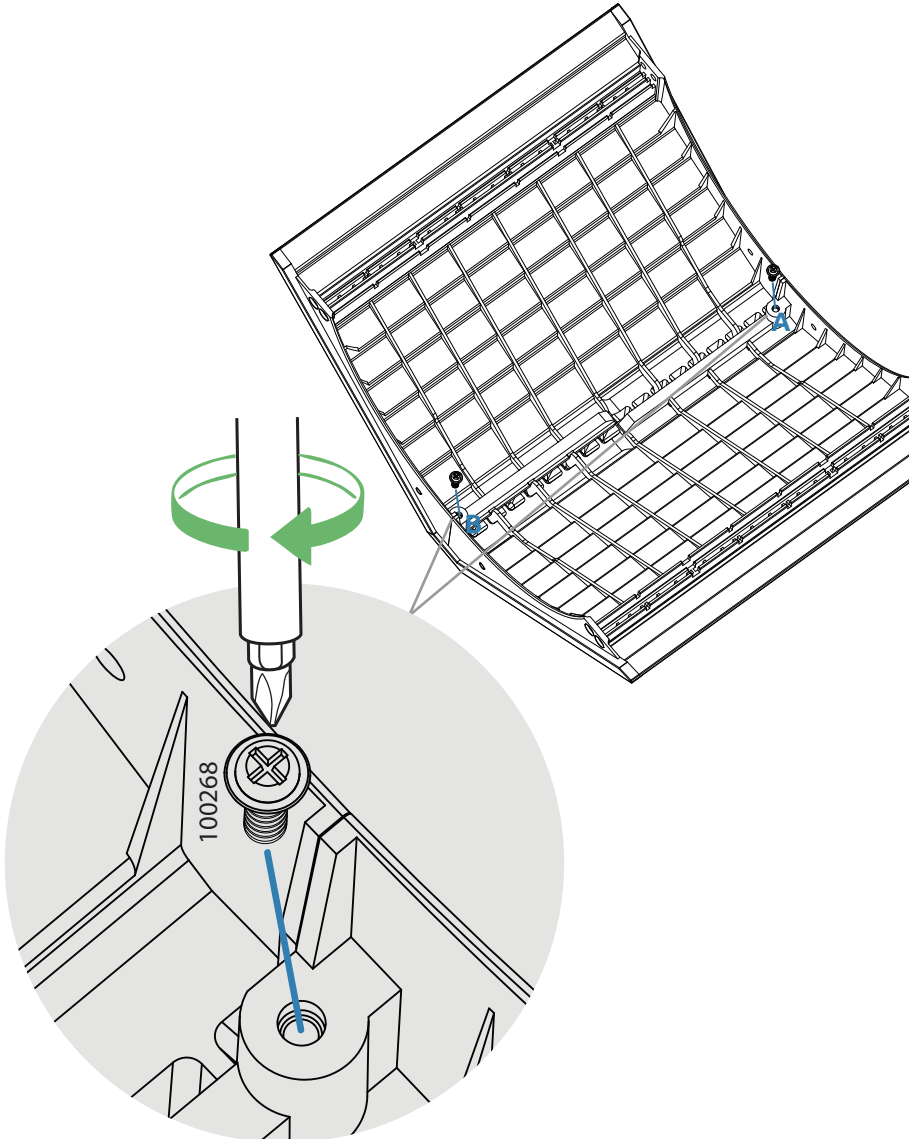

STEP 4—Attach Left Side Wall Panel

J Side Wall Panels x1



- 4-1. Take the assembled Roof Panels (I) and a Side Wall Panel (J). Ensure the faux-brick textured side faces outward.
- 4-2. Align the points (A–L) along the top edge of the Side Wall Panel (J) with the corresponding slot points (a–l) on the left side of the Roof Panels (I).
- 4-3. Slide the Side Wall Panel (J) downward into the slots until it is fully seated.

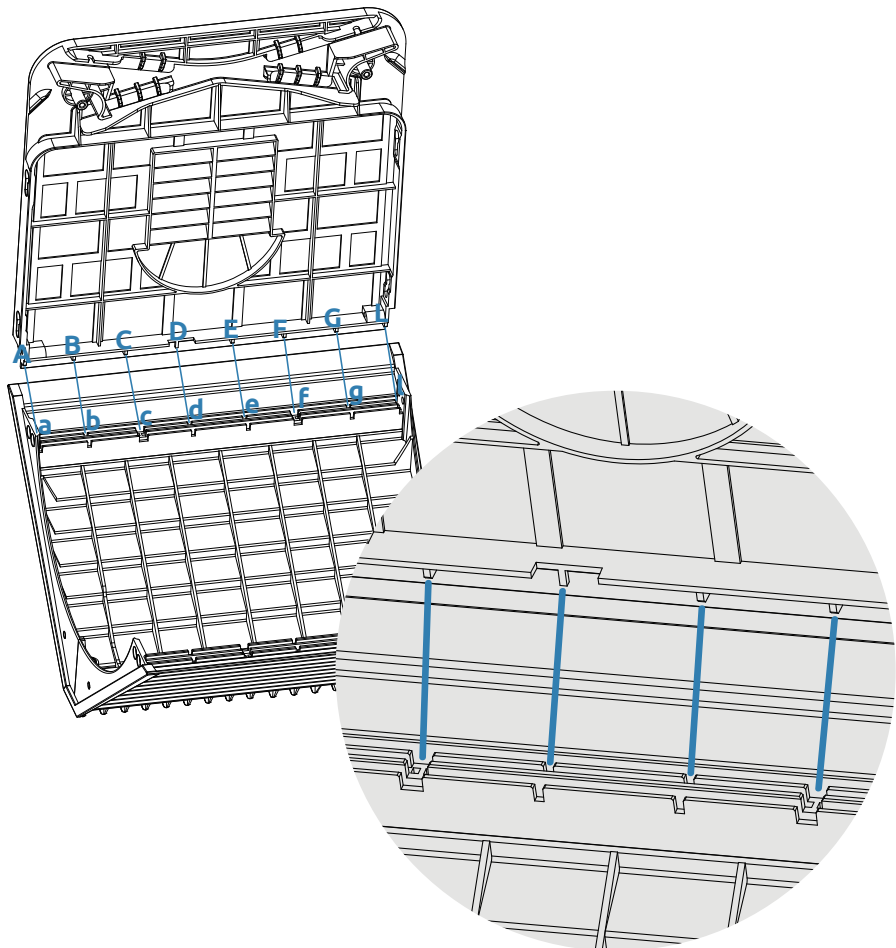

STEP 5— Attach Right Side Wall Panel

J Side Wall Panels x1


Repeat Step 4 for the right Side Wall Panel (J).

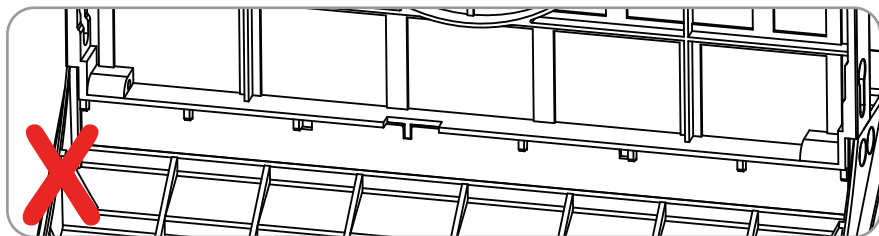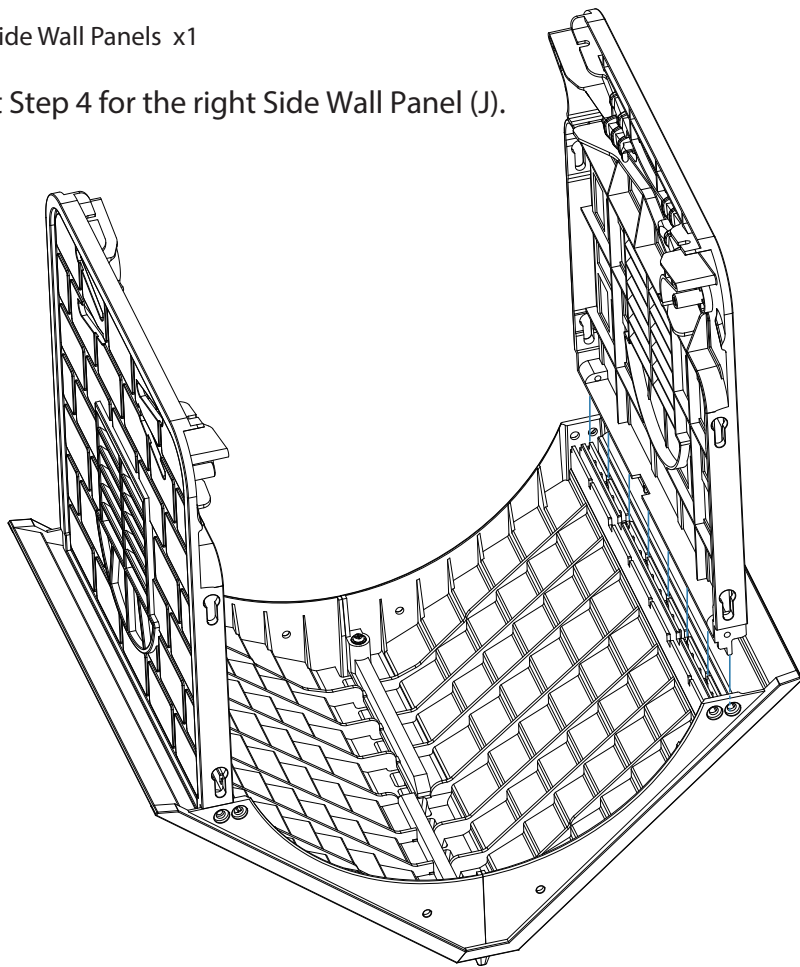

STEP 6—Secure Side Wall Panels

- O** Pan-Head Screws (M4x14) x4

Tighten Pan-Head Screws (O) into the four outer holes, labeled A , B , C , D .

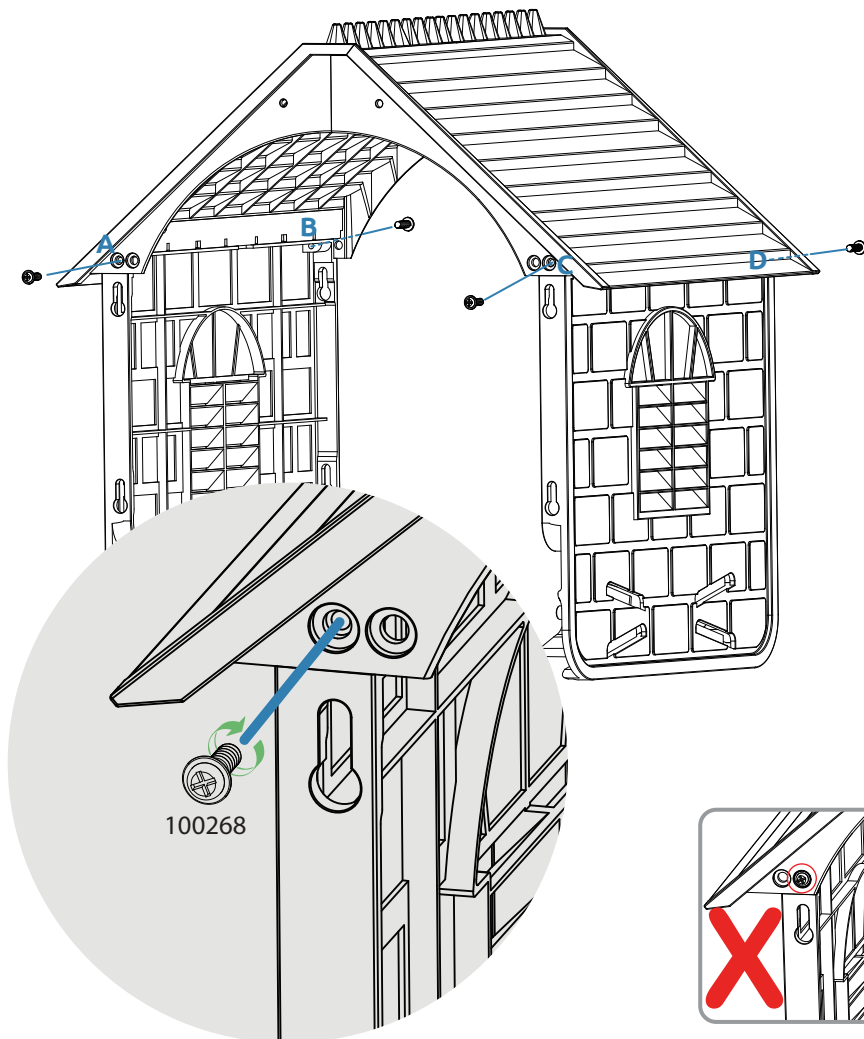


 TIP


- Both Side Wall Panels should stand upright without leaning.
All 2 screws on each panel should be fully tightened.

STEP 7—Assemble Entry Perch with Support Brackets

K Entry Perch **L** Support Brackets x2 **O** Pan-Head Screws (M4x14) x2

- 7-1. Place the Entry Perch (K) flat on your work surface, ridged side facing up.
- 7-2. Take one Support Bracket (L) and insert its top tab into the corresponding slot on the Entry Perch (K).
- 7-3. Press firmly until the bracket tab is fully seated.
- 7-4. Insert one Pan-Head Screw (O) into hole A and tighten.
- 7-5. Repeat for the RIGHT side Support Bracket at hole B.

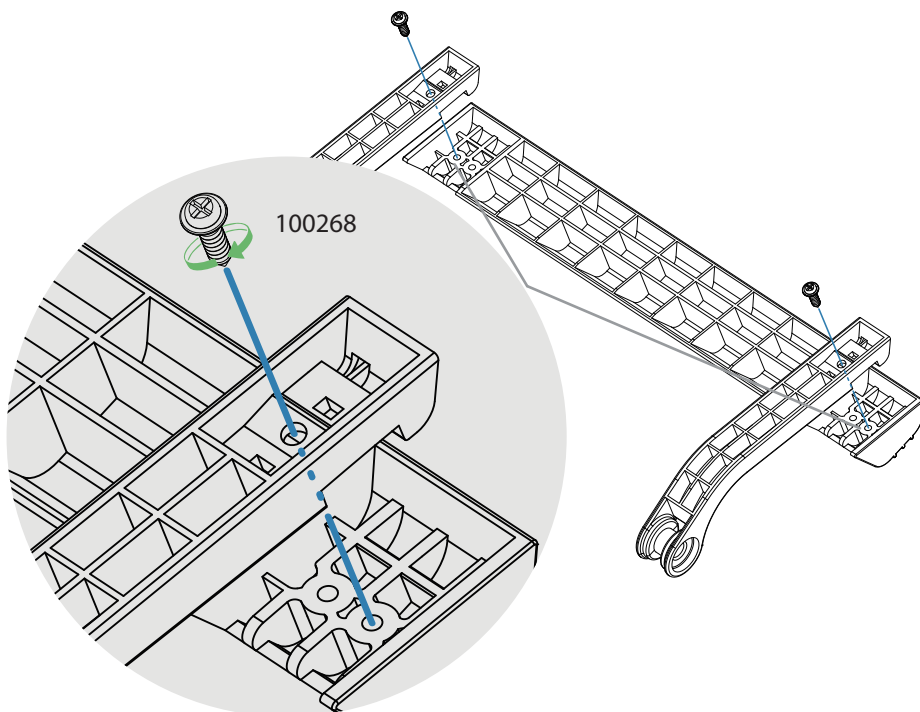

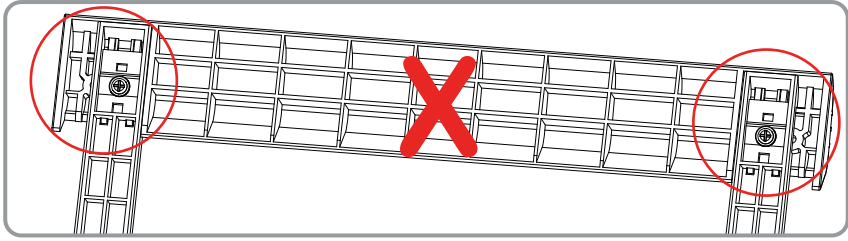



 TIP

- Both Brackets should be perpendicular (90°) to the Perch. The Perch should not flex .

STEP 8—Attach Entry Perch to Side Wall Panels

- 8-1. Locate the two mounting bosses (raised cylindrical posts) labeled A and B on the front lower edge of the Side Wall Panels (J).
- 8-2. Align the bottom holes of the Left Support Bracket with boss A, and the Right Bracket with boss B.
- 8-3. Press the brackets onto the bosses firmly.

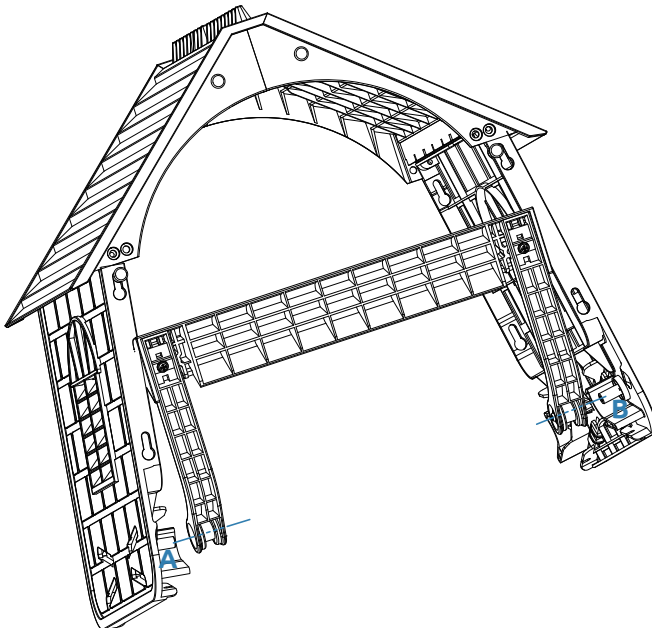

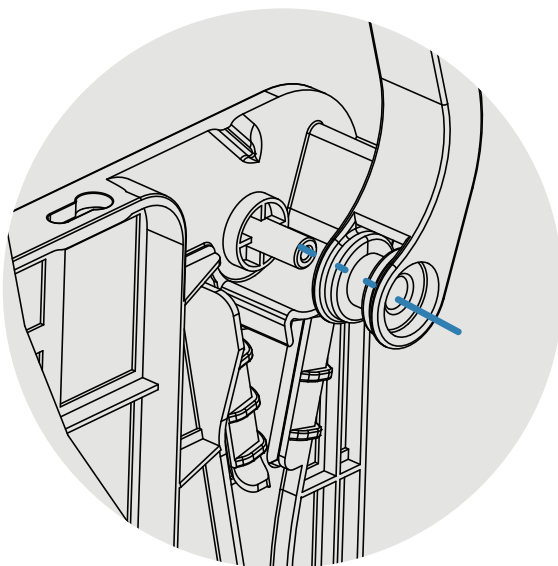



STEP 9—Secure Support Brackets

O Pan-Head Screws (M4x14) x2

Q Washers x2

Place Washers (Q) into Holes C and D, then insert Pan-Head Screws (O) and tighten from the side to lock the brackets in place.

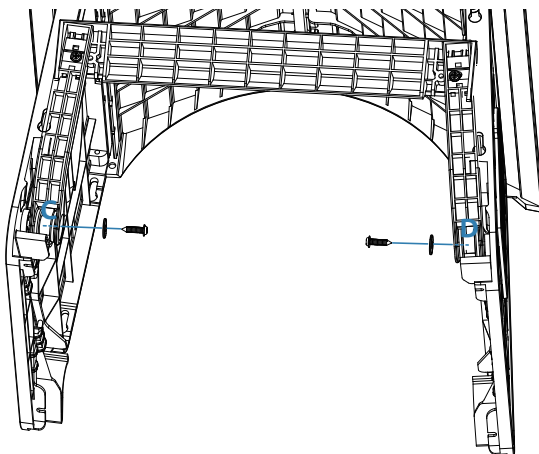


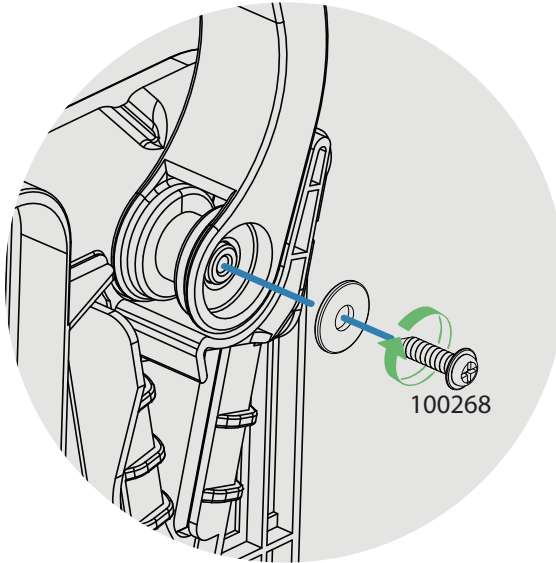 **TIP**

- The Entry Perch should remain level. It should feel stable and secure when hand pressure is applied downward.


STEP 10—Insert Roll-Away Nesting Box

- 10-1. Locate the slide rail channels on the inner sides at the bottom of the left and right Side Wall Panels (J).
- 10-2. Align the outer guide rails of the Roll-Away Nesting Box with the slide rail channels.

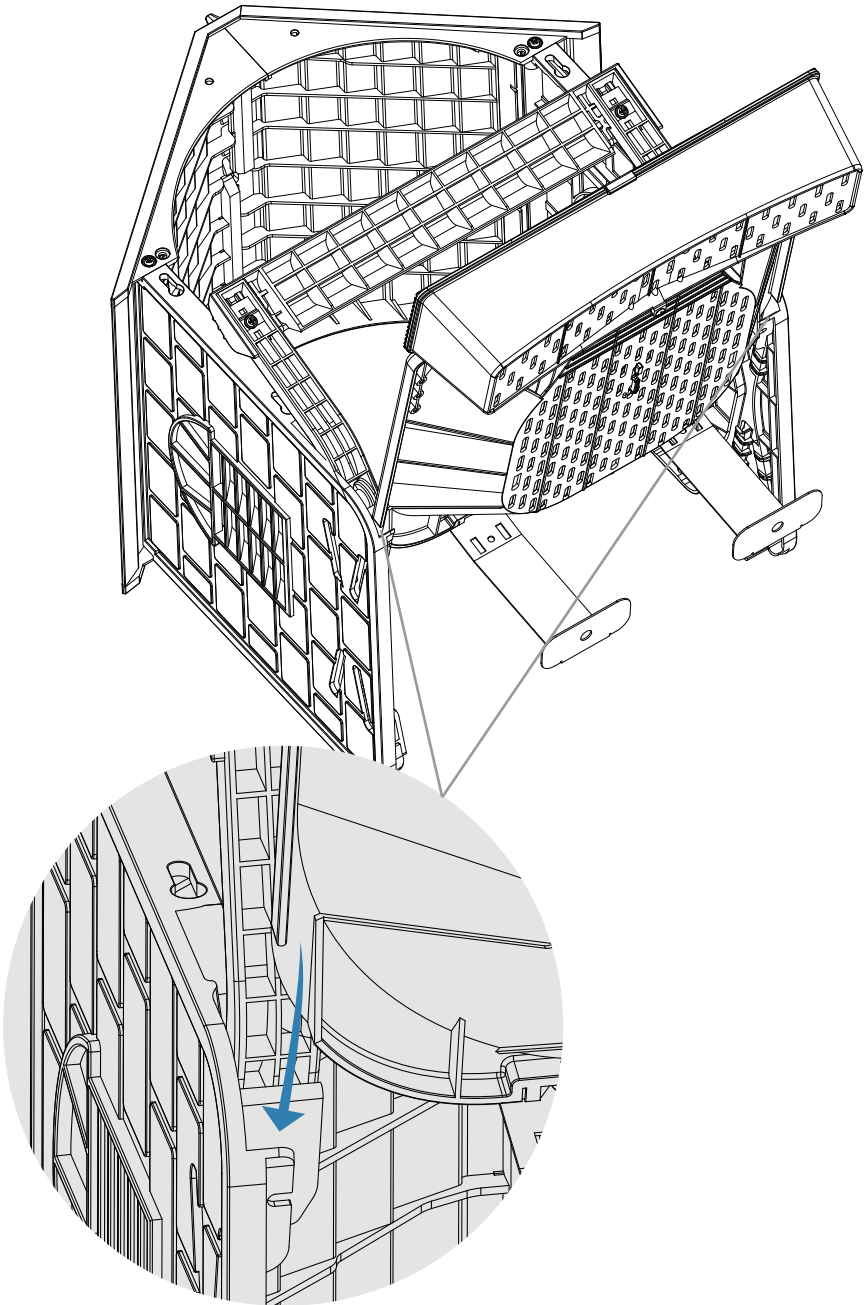



STEP 11—Slide Roll-Away Nesting Box into Position

Slide the Roll-Away Nesting Box along the tracks into the left and right inner rails of the Side Wall Panels (J) until it reaches the end stop.

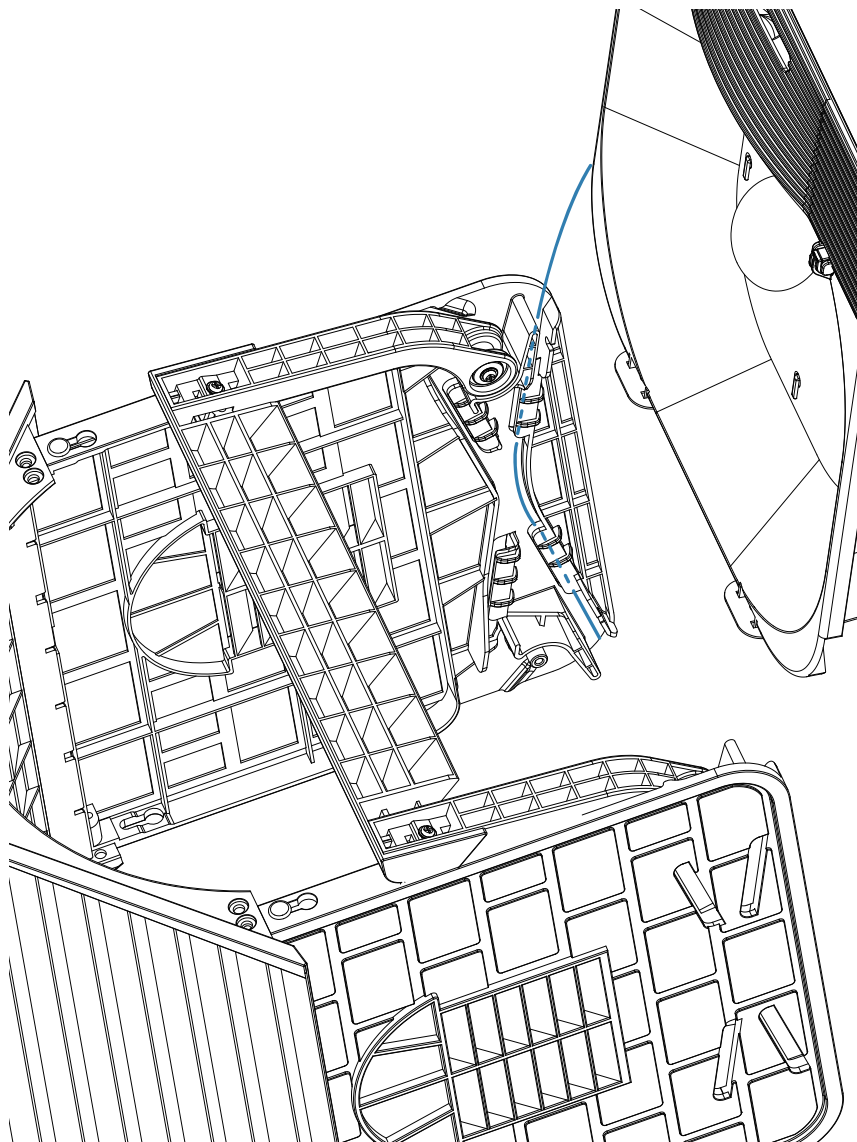

⚠ IMPORTANT



- The outer guide rails of the Roll-Away Nesting Box must be properly seated in the inner tracks of the Side Wall Panels (J).

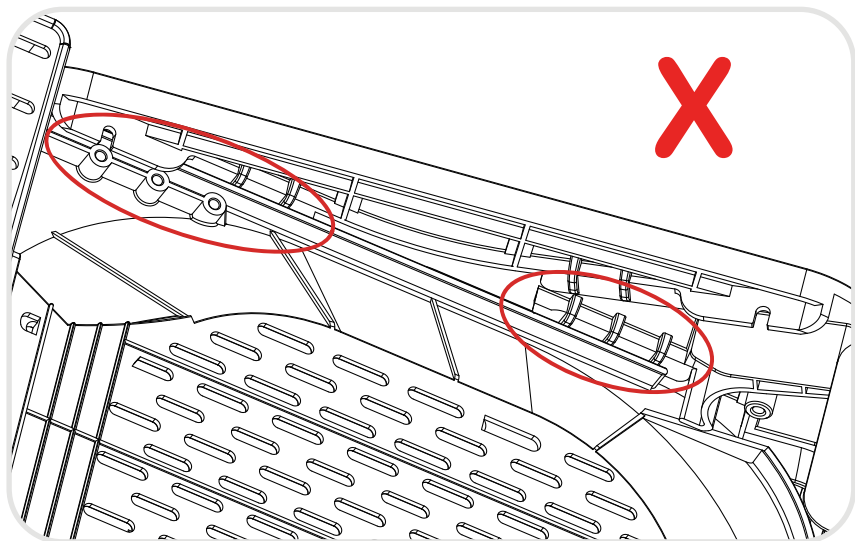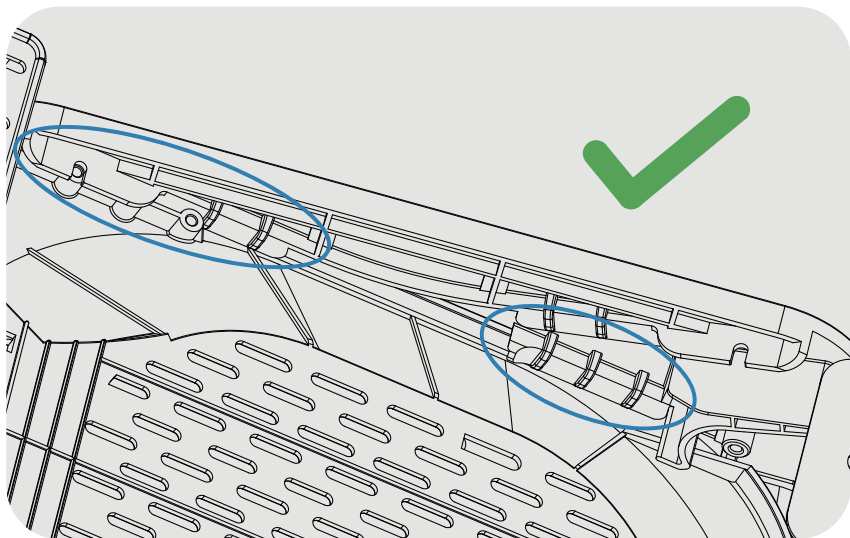

STEP 12—Secure Roll-Away Nesting Box

P Thumb Screws (M3x18) x2

Insert Thumb Screws (P) into Holes A and B, and tighten by hand (no tools required).

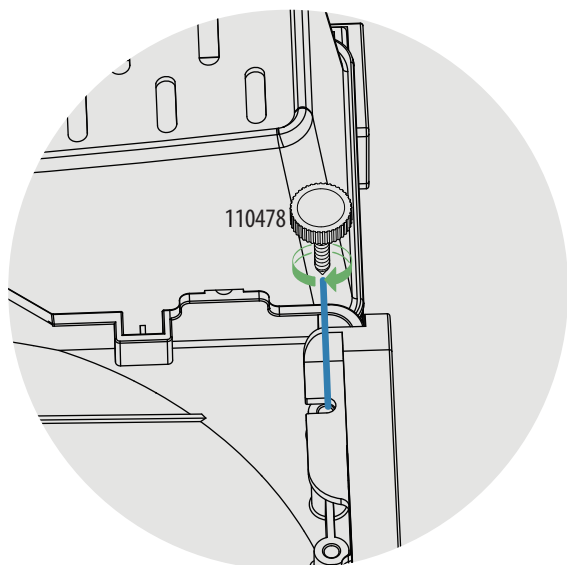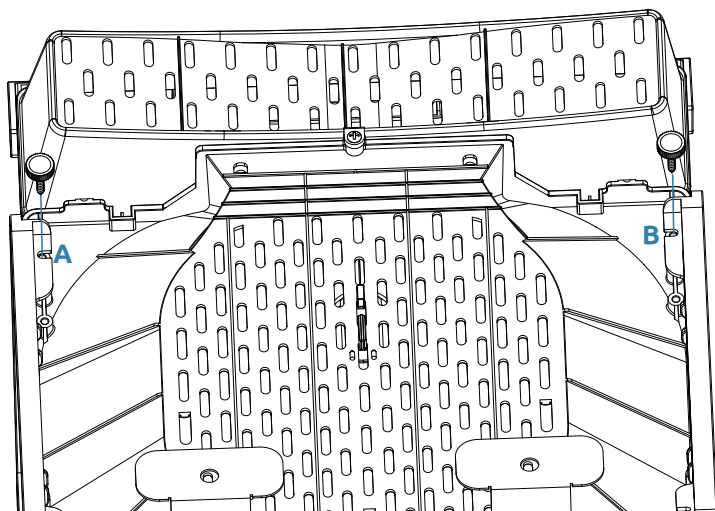

TIP

- Once tightened, the nesting box should remain securely fixed and should not shift during use.


STEP 13—Install Privacy Curtain



M Privacy Curtain

R Snap Base - Female
(transparent) x4

S Snap Cap - Male
(transparent) x4

- 13-1. From the inside of the roof eave panel, press one Snap Cap-Male (S) into Hole A until it sits flush.
- 13-2. Drape the Privacy Curtain (M) over the arch opening, aligning curtain hole a with Hole A on the eave panel.
- 13-3. Push one Snap Base-Female (R) through curtain hole a into the Snap Cap-Male (S) until it clicks securely.
- 13-4. Repeat the above steps for Holes B, C, D and curtain holes b, c, d.

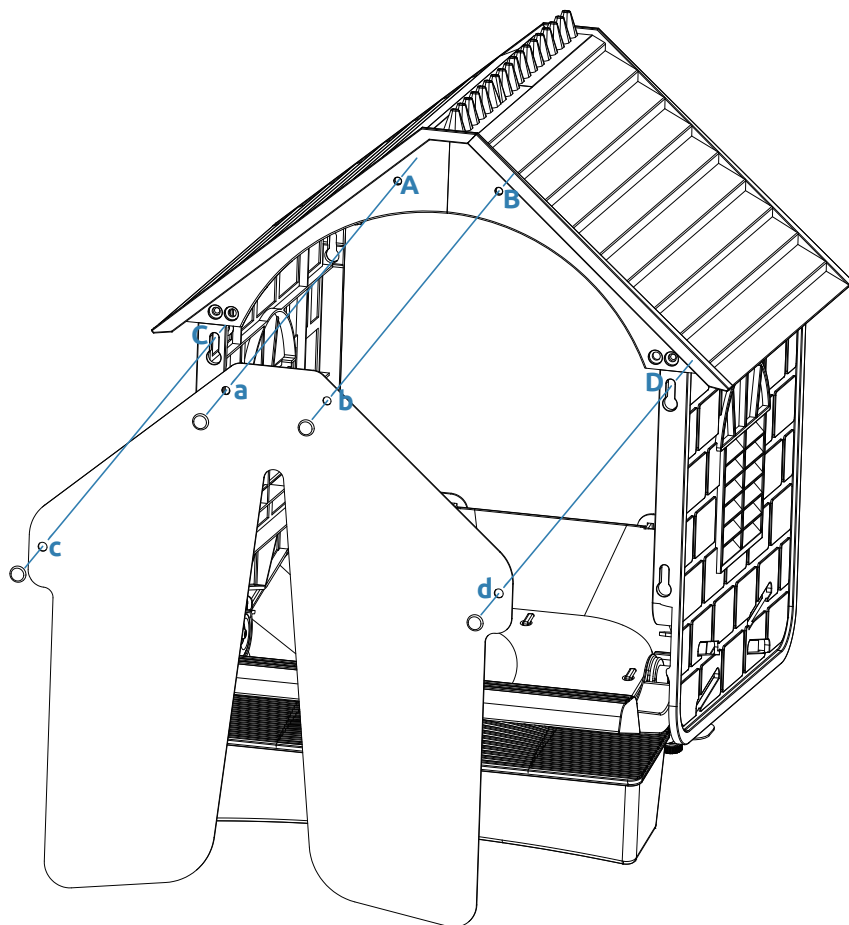

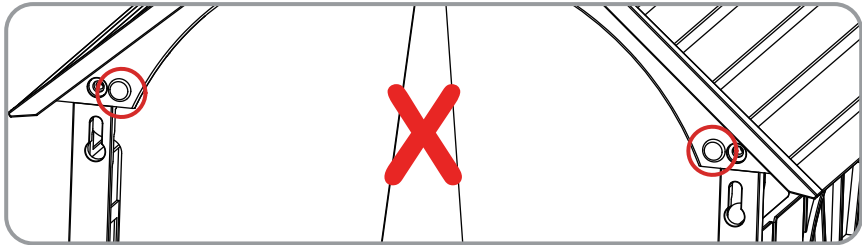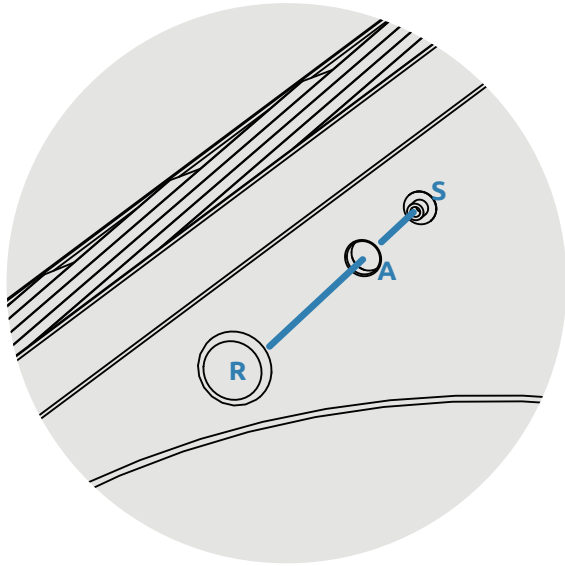

 TIP


- Tug the Curtain gently — it should hold in place without pulling free.

CHOOSING YOUR SETUP MODE

Mode 1 — Floor Standing

Place the assembled unit directly on the floor of your chicken coop.

- Ensure the mounting surface is level.
- Use the Steel Support Brackets (D) at the bottom of the Nesting Box for added stability.

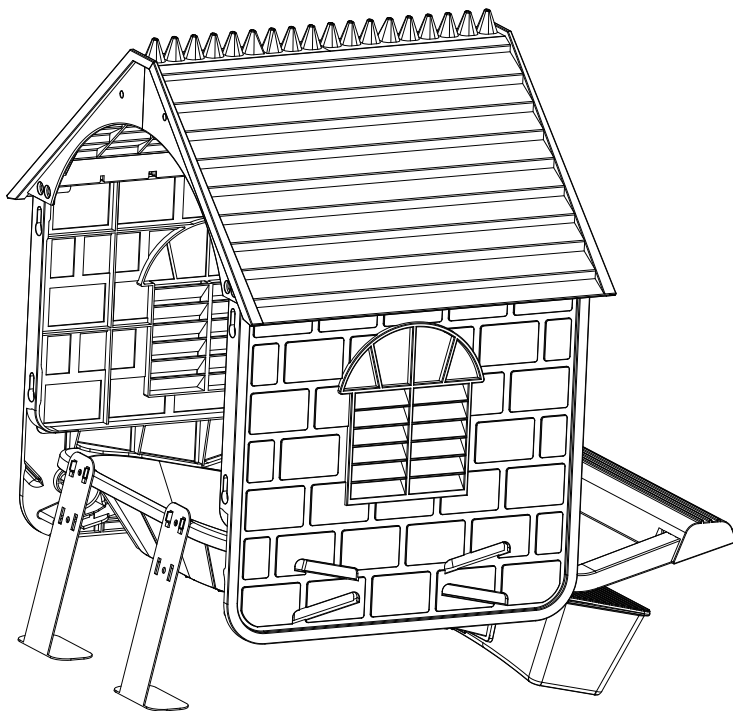

TIP

- Recommended clearance: Leave at least 6 inches (approx. 15 cm) of open space in front of the unit for easy egg collection.

Mode 2 — Wall Mounted




Mounting template




Pan-Head Screws (M4x14) x4

- 2-1. Attach the included Mounting Template (N) to the wall at the desired location.
- 2-2. Using a drill bit appropriate for your wall type, drill four holes at the positions marked A, B, C, and D on the Mounting Template (N).
- 2-3. If mounting on drywall or concrete, insert wall anchors into the drilled holes. (Wall anchors are not included.)
- 2-4. Drive Pan-Head Screws (O) into the wall, leaving approximately one-third of each screw protruding.
- 2-5. Hold the unit flat against the wall. Align the mounting keyhole slots (a, b, c, d) on the back of the unit with the protruding screws, insert, then slide downward to lock into place.

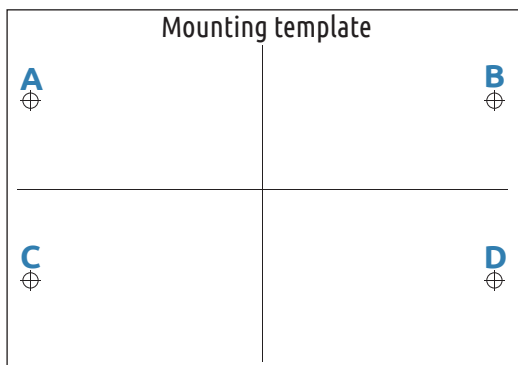

WARNING

- Ensure the wall surface can support the combined weight of the unit plus eggs. For drywall mounting, always use appropriate wall anchors and locate a wall stud where possible.

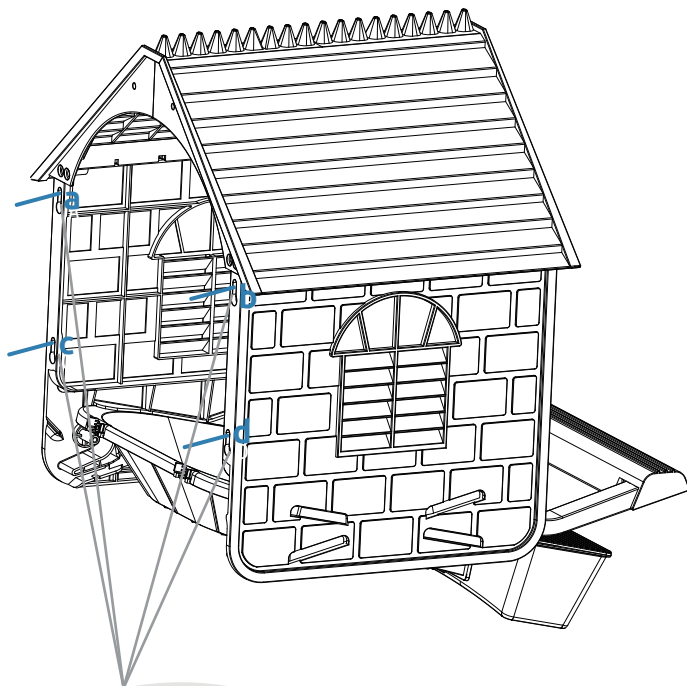

⚠ IMPORTANT

- For wall-mounted use, be sure to remove the steel support brackets (D).

CUSTOMER SUPPORT



Product Support Center

Questions? Missing parts? Video Support;
Warranty registration, We are here to help.

EMAIL: support@difsight.com

- Response within 24 business hours
- Monday–Friday, 9 AM–5 PM EST

When contacting support, please have ready:

- The model number
- A description or photo of the issue



Scan for Support

WARRANTY

1-Year Limited Warranty

- Difsight warrants this product to the original retail purchaser for 1 year from the date of purchase under normal home flock use.

What this warranty covers

- Defective or broken parts caused by manufacturing defects
- Missing parts from the original sealed kit
- Replacement parts for covered issues during the warranty period

What this warranty does not cover

- Normal wear and tear — including jute pad degradation from regular hen use
- Damage caused by improper assembly, misuse, modification, or neglect
- Damage caused by animals beyond normal poultry use (e.g., chewing by dogs or rodents)
- Cosmetic wear (scuffs, discoloration) that does not affect function
- Damage from misuse, abuse, or modification
- Damage from use outside the stated flock size or intended use

How to make a warranty claim

- Contact customer support with:
 - proof of purchase
 - the model number
 - a description of the issue
 - clear photos

Remedy

- Difsight may provide replacement parts, a replacement product, or another remedy at its discretion.

Legal notice

- This warranty gives you specific legal rights. You may also have other rights that vary by state.



Video Assembly Guide: Scan
for step-by-step video